

Network Setup Requirements

SiriusXM Internet Music for Business Player



Model: BrightSign Media Player

SiriusXM players use the BrightSign Network cloud-based content management system for remote scheduling and status monitoring. This document outlines how to configure a network so that BrightSign players can communicate with the BrightSign Network.

Allowed URLs and Ports

Allowed URLs and Ports BrightSign players communicate with the BrightSign Network using the following URLs and ports:

- <https://services.brightsignnetwork.com:443> (primary)
- <http://services.brightsignnetwork.com:80> (alternate)
- <http://bsnm.s3.amazonaws.com:80>

These URLs should be allowed through proxies and firewalls on the local network

Software Updates

Software updates are pushed by BrightSign to the SXM Cloud App. When this occurs, you will be notified that a software update is available the next time you log into your account.

If you respond to this dialog and agree to have your player updated, then upon next checking to the Cloud Server, your player will download and install a contemporary version of the firmware without any user interaction.

Player Physical Connections

Step 1:


Use the supplied power adapter to connect to AC power.

Step 2:

Connect an ethernet cable from the player to the back of your modem or router.

Step 3:

Connect a 3.5mm-to-RCA audio cable from your player to your audio or phone system.

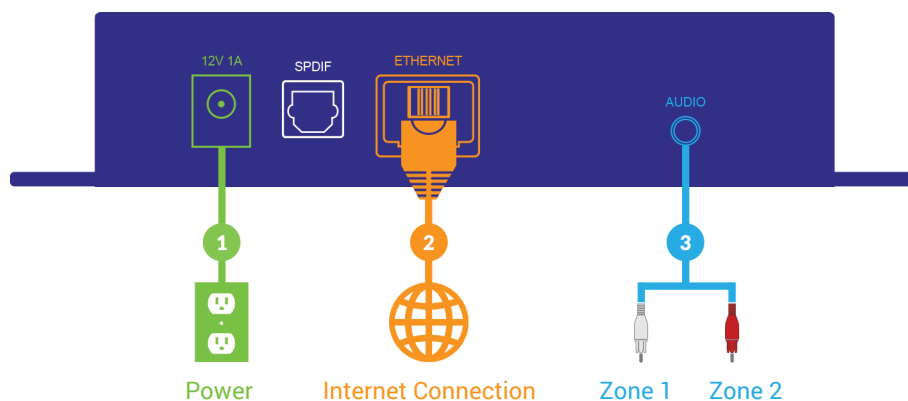

For further assistance, please contact Dynamic Media at 1-800-684-7050 or visit us on the web at www.Business.DynamicMediaMusic.com/Support